
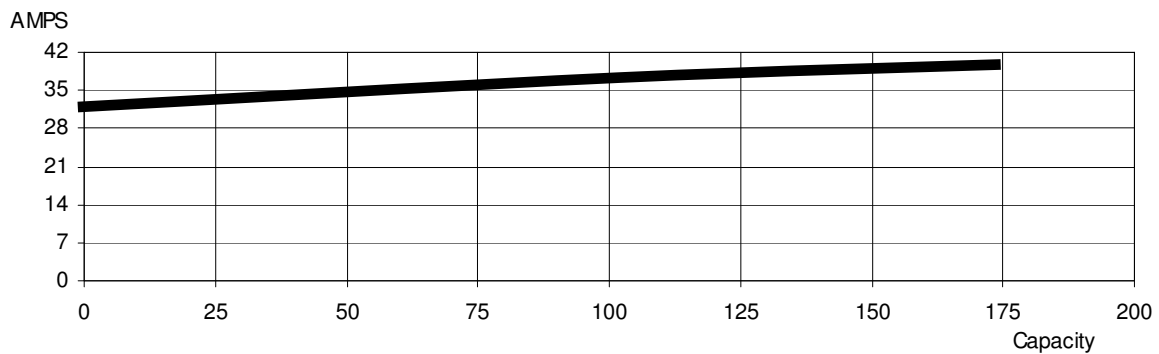


KEEN PUMP

Submersible Grinder Pumps

<i>General</i>		<i>Motor Data</i>		
Project Name		HP / Service Factor	5 HP / 2.37	
Date / Curve No.	/	Start Relay	Keen Model RE-5	
<i>Pump Data</i>		Start Capacitor	274-324 mfd, 250 Volt	
Model No.	KG-51	Run Capacitor	30 mfd, 370 volt	
Discharge	2.5" / 3" Horz. Flange	Rated Power	208 / 230 volt, 1-Phase	
Grinder Ring	25 Slots	Rated Current	44 / 40 amps	
Impeller Dia.	5 1/4 " Max Dia.	Starting Current	88 / 78 amps	
Impeller Vanes	10	Pole / Rate Speed	2 Pole / 3450 RPM	
Impeller Type	Recessed Vortex	Insulation Class	F	
<i>Performance Curve</i>				

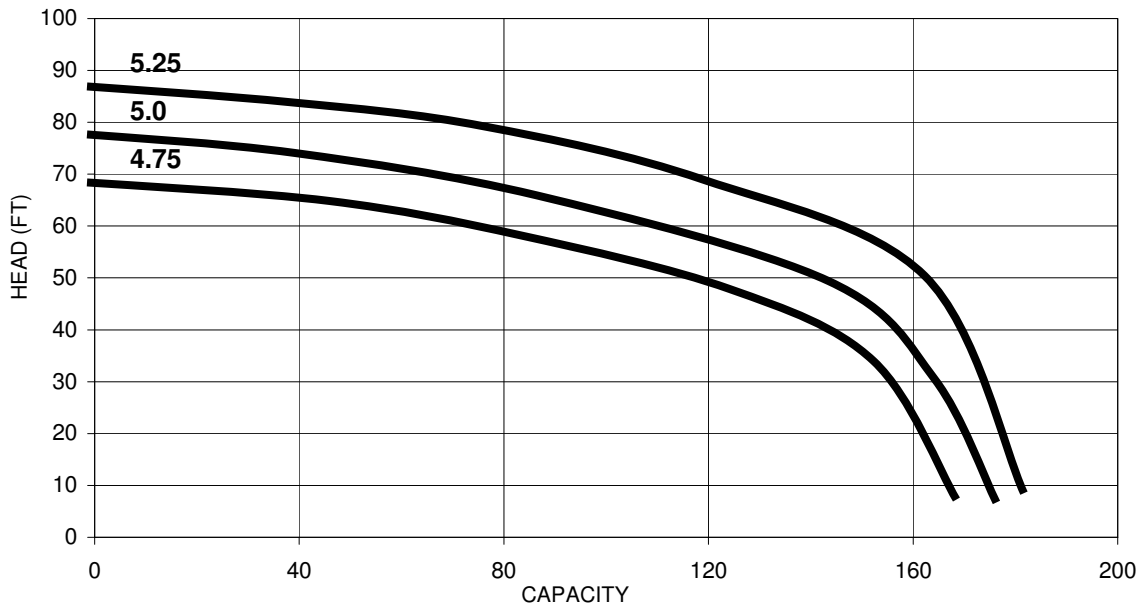

KEEN PUMP

Submersible Grinder Pumps

General		Motor Data	
Project Name		HP / Service Factor	5 HP / 2.10
Date / Curve No.	/	Efficiency (%)	
Pump Data		Start Capacitor	
Model No.	KG-53	Run Capacitor	
Discharge	2.5" / 3" Horz. Flange	Rated Power	208 / 230 / 460 volt, 3-Phase
Grinder Ring	25 Slots	Rated Current	29 / 25 / 13 amps
Impeller Dia.	4 1/4 " Max Dia.	Starting Current	62 / 56 / 28 amps
Impeller Vanes	10	Pole / Rate Speed	2 Pole / 3450 RPM
Impeller Type	Recessed Vortex	Insulation Class	F
Performance Curve			

