
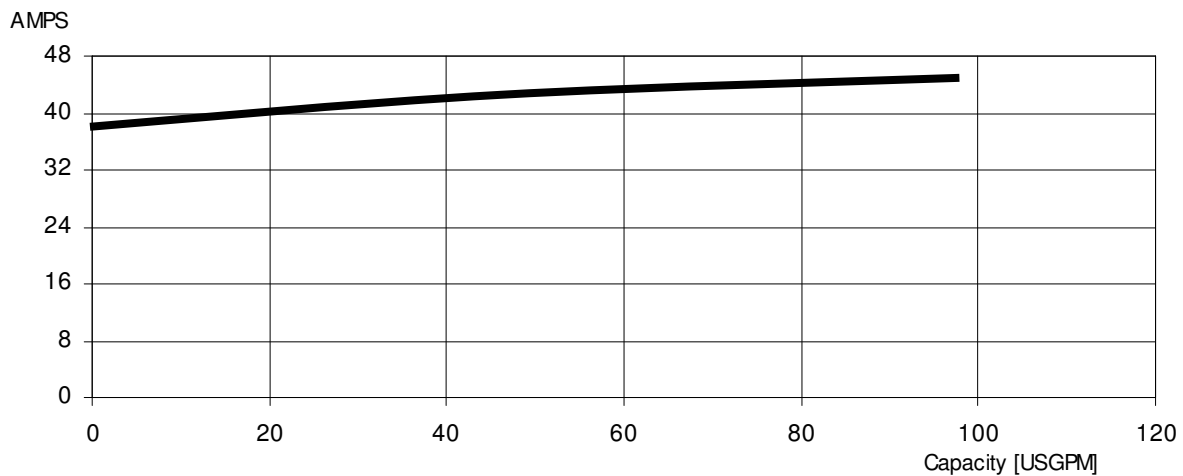


Keen Pump

Submersible Grinder Pumps

General		Motor Data	
Project Name		HP / Service Factor	7.5 HP / 1.40
Date / Curve No.	/	Start Relay	Keen Model RE-5
Pump Data		Start Capacitor	274 / 324 mfd, 250 Volt
Model No.	KHG-71	Run Capacitor	30 mfd, 370 volt
Discharge	2.5" / 3" Horz. Flange	Rated Power	230 volt, 1-Phase
Grinder Ring	18 Slots	Rated Current	47amps
Impeller Dia.	6 1/2" Max Dia.	Starting Current	86 amps
Impeller Vanes	10	Pole / Rate Speed	2 Pole / 3450 RPM
Impeller Type	Recessed Vortex	Insulation Class	F

Performance Curve

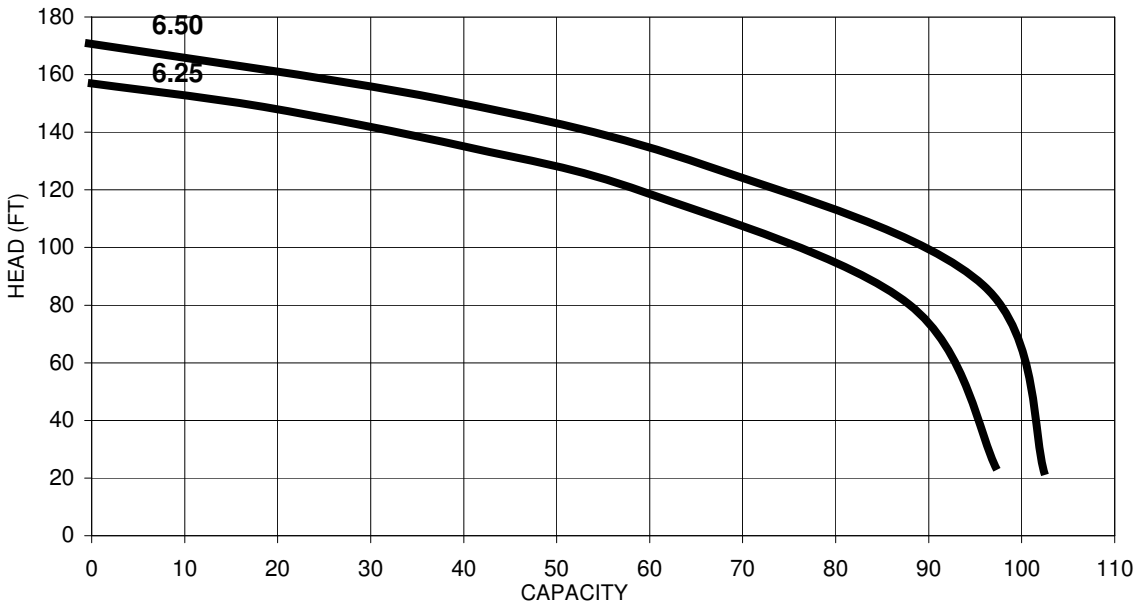

Keen Pump

Submersible Grinder Pumps

General		Motor Data	
Project Name		HP / Service Factor	7.5 HP / 1.25
Date / Curve No.	/	Efficiency (%)	
Pump Data		Start Capacitor	
Model No.	KHG-73	Run Capacitor	
Discharge	2.5" / 3" Horz. Flange	Rated Power	230 / 460 volt, 3-Phase
Grinder Ring	18 Slots	Rated Current	32 / 16 amps
Impeller Dia.	6 1/2" Max Dia.	Starting Current	81 / 72 / 36 amps
Impeller Vanes	10	Pole / Rate Speed	2 Pole / 3450 RPM
Impeller Type	Recessed Vortex	Insulation Class	F

Performance Curve

