


KEEN PUMP

Submersible Grinder Pumps

General		Motor Data	
Project Name		HP / Service Factor	2 HP / 1.92
Date / Curve No.	/	Start Relay	Keen Model # RE-2
Pump Data		Start Capacitor	150 mfd, 250 volt
Model No.	KHG2-21	Run Capacitor	30 mfd, 370 volt
Discharge	1-1/4" NPT Vertical	Rated Power	208 / 230 volt, 1-Phase
Grinder Ring	8 Slots	Rated Current	14 / 12.8 amps
Impeller Dia.	5.625"	Starting Current	28 amps
Impeller Vanes	12	Pole / Rate Speed	2 Pole / 3450 RPM
Impeller Type	Recessed Vortex	Insulation Class	F
Performance Curve			

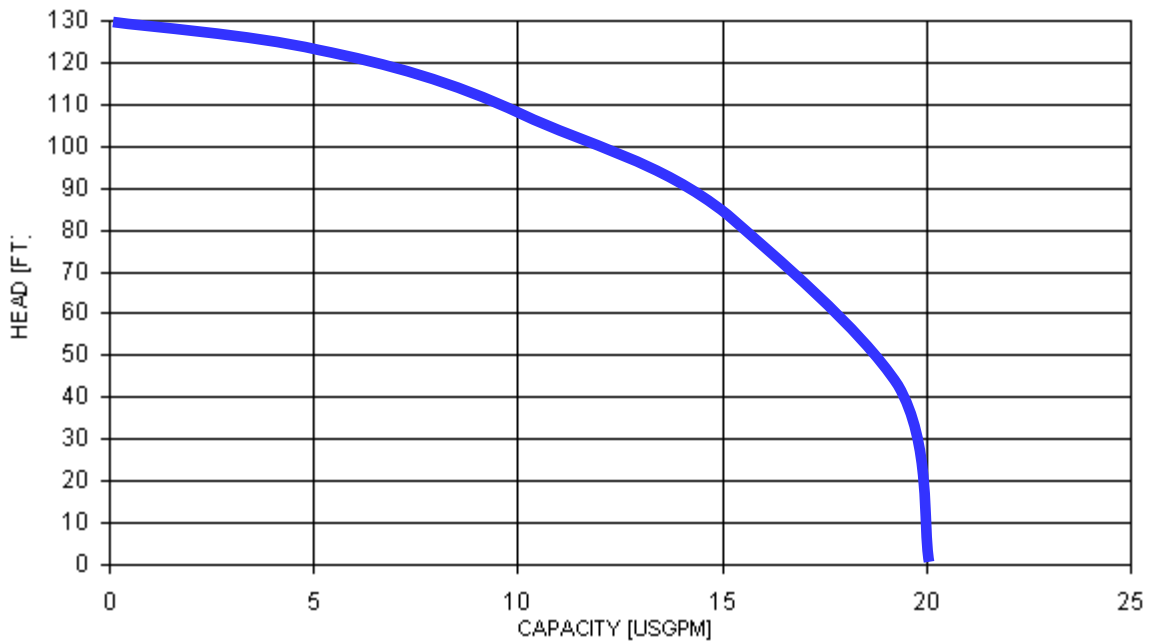

Performance Chart

Flow (GPM)

5 GPM

10 GPM

15 GPM

Head (Feet)

122 ft


107 ft

83 ft

KEEN PUMP

Submersible Grinder Pumps

General		Motor Data	
Project Name		HP / Service Factor	2 HP / 1.92
Date / Curve No.	/	Efficiency (%)	
Pump Data		Start Capacitor	
Model No.	KHG2-23	Run Capacitor	
Discharge	1-1/4" NPT Vertical	Rated Power	208 / 230 / 460 volt, 3-Phase
Grinder Ring	8 Slots	Rated Current	10 / 9 / 4.5 amps
Impeller Dia.	5.625"	Starting Current	24 / 22 / 11 amps
Impeller Vanes	12	Pole / Rate Speed	2 Pole / 3450 RPM
Impeller Type	Recessed Vortex	Insulation Class	F
Performance Curve			

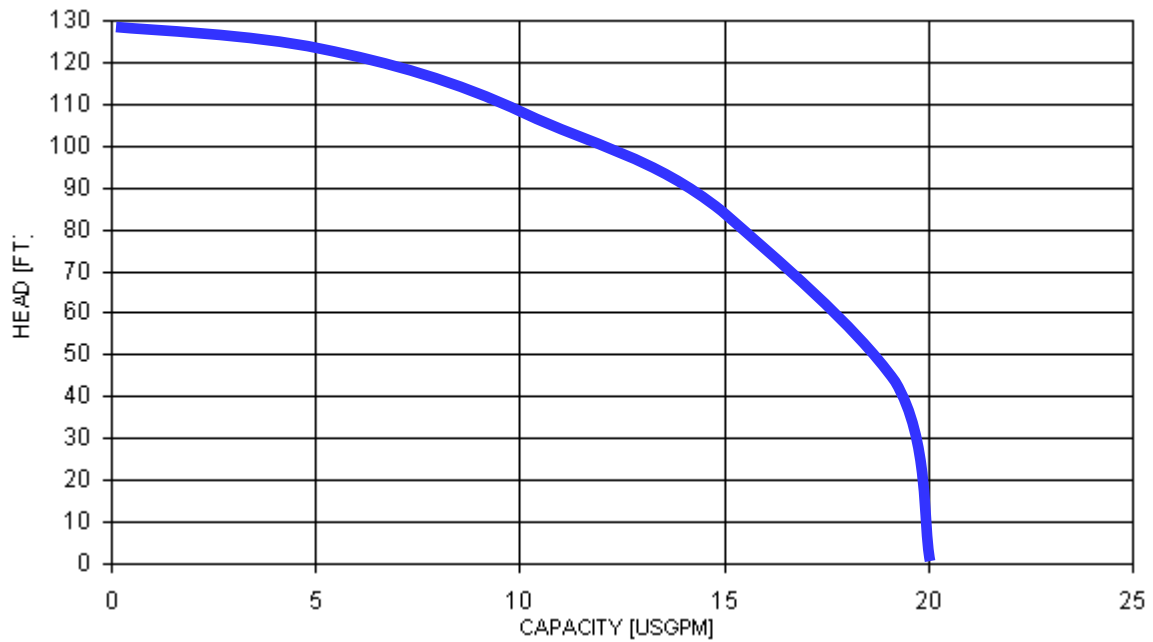

Performance Chart

Flow (GPM)

5 GPM

10 GPM

15 GPM

Head (Feet)

122 ft

107 ft

83 ft